Bobcat

One Tough Animal

DIESEL FORKLIFTS

7-Series, Pneumatic, 2.0 to 3.5-ton capacity

MEA & CIS





TOUGH CONDITIONS.
TOUGHER PEOPLE.

At Bobcat, we're not just building machines—we're also celebrating the people who push them to the limit. Because real strength isn't just built into machines—it comes from the people who operate them.

LEARN MORE

ONE TOUGH ANIMAL

OUR MISSION

We empower operators to accomplish more, while working in the toughest conditions and tightest situations. When our customers have the will, we provide the way.



INTRODUCTION

BOBCAT'S HISTORY

In 1958, the Melroe Manufacturing Company introduced a compact front-end loader that quickly evolved into the M400, the world's first true skid-steer loader. The company soon adopted what became the world famous 'Bobcat' brand — and its success paved the way for the global compact equipment industry we see today.

YEARS OF EXPERIENCE

In 2021, Bobcat furthered its reach by acquiring Doosan Industrial Vehicle, increasing its capacity to provide customers with comprehensive business solutions. With Doosan's expertise in material handling and warehouse equipment dating back to its inaugural forklift in 1968, the company has established a global presence, with 400 dealers across 93 countries.



BOBCAT TODAY


Now, with a diversified portfolio that includes forklifts and warehouse equipment, Bobcat serves as a one-stop solution for intralogistics needs, from loading shipping containers to optimizing warehouse operations. Made according to the highest manufacturing standards, Bobcat's material handling machines offer the precision and durability customers expect.



TOUGH, AGILE & SAFE

READY TO GIVE YOUR BUSINESS A LIFT

Give your business a boost with a diesel forklift that ticks all the boxes: a high-performance, powerful, and efficient engine; smooth and variable controls; and a full suite of safety features—all in a machine that is rugged, dependable, and easy to service, with a low total cost of ownership.

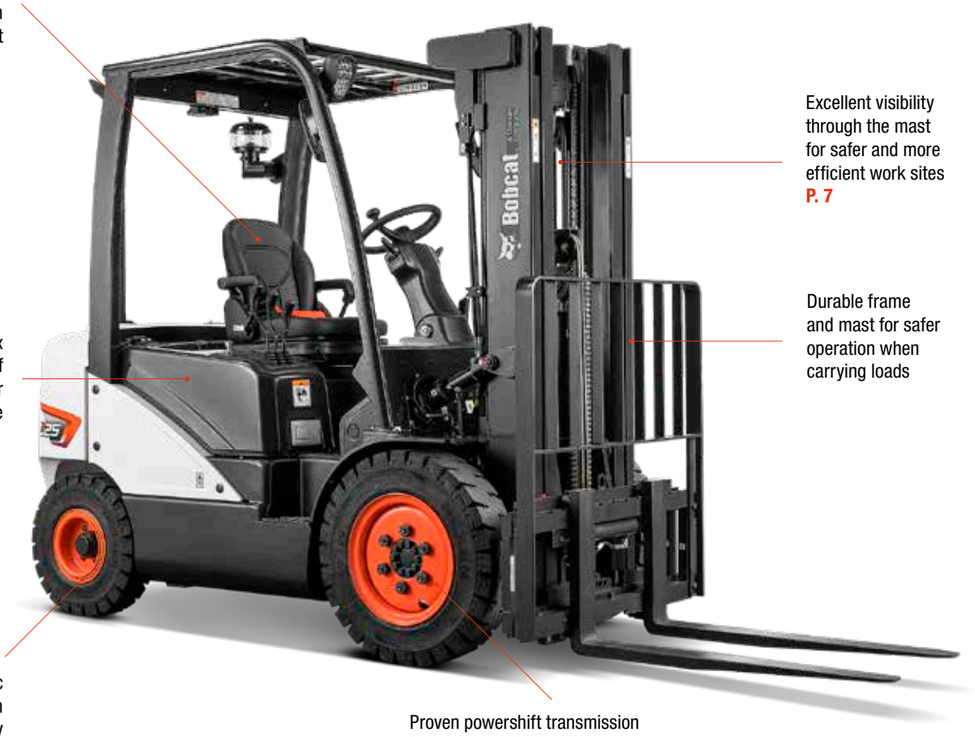





ULTIMATE PRODUCTIVITY

Get more done daily thanks to the high-performing yet efficient G2 and Yanmar engines with best-in-class travel and lifting speeds.
P. 6–7



ALL-DAY COMFORT

Experience a more comfortable shift with a range of standard quality-of-life features, including an ergonomic seat, instrument panel, ample leg room, anti-slip plate, and more.
P. 8–9



DRIVEN BY SAFETY


Enjoy peace of mind provided by the machine's excellent all-around visibility, superb stability, and a full suite of safety features.
P. 10–11



MAXIMUM UPTIME

Reduce your total ownership costs by extending service intervals and utilizing high-quality Bobcat genuine parts and consumables, which contribute to smoother and longer-lasting machine performance.
P. 12–13

OUTSTANDING PRODUCTIVITY

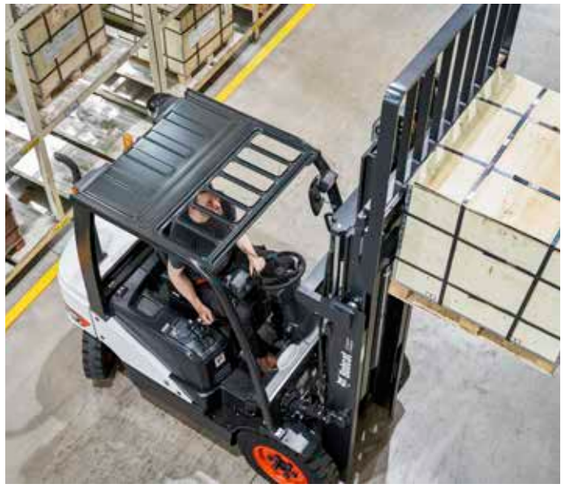

EXCELLENT VISIBILITY

Thanks to the precisely designed overhead guard with angled roof bars, low cowl height, and excellent visibility through the mast, you have the best view of the task at hand, enabling you to accomplish more every day.



POWERFUL DIESEL ENGINE

The high-performance yet efficient G2 or Yanmar engines provide best-in-class travel and lifting speeds. A silent chain timing belt and an aluminum cylinder block design keep the noise level to a minimum.



EFFORTLESS DIRECTIONAL CHANGES

The well-tested powershift transmission precisely controls the clutch oil pressure, ensuring smooth shifts between forward and reverse. This careful control helps prevent transmission damage and makes the forklift stronger and longer-lasting.



RELIABLE BRAKING POWER

Oil-cooled disc brakes offer outstanding stopping performance and extended durability with minimal maintenance. The brake systems are entirely sealed to safeguard against external contaminants, ensuring reliable operation.

COMFORT & CONTROLS





EASILY ADJUSTABLE SEAT & COLUMN

The premium suspension seat provides ample space for the operator and all-day comfort for long shifts. The seat and the steering wheel column are easy to adjust, allowing every operator to feel right at home in the cab.



DELUXE SUSPENSION SEAT

The deluxe suspension seat prioritizes operator comfort with an adjustable seat back, extended seat travel length, and front-side weight resistance. These features enable multiple adjustments for the most comfortable seating experience.



FULL OR MODULAR CAB

Equip your forklift with one of our factory-made cabs to conquer all weather conditions. Enhance comfort for all-day use by adding options such as a heater, operator fan, and power jack.



REAR CAMERA DISPLAY

Equip your machine with a rear camera that feeds into the in-cab display when in reverse, ensuring you always have the best view of your workplace without sacrificing comfort.

RADIO AND MP3 PLAYER



Add a radio and MP3 player to your cab to enjoy even the longest shifts.

WELL-PLACED HANDLES



Stepping in and out of your vehicle is quick and comfortable, thanks to the well-placed entry bar and handles.

ERGONOMIC CONTROLS



Thanks to the ergonomic design and perfect placement of control elements, operating this machine is as easy as can be.



SAFETY IN EVERY MOVE

ADVANCED PROTECTION FOR YOU AND YOUR OPERATION

Bobcat forklifts have safety embedded in their DNA. Packed with tons of features that protect you and your investment, these machines provide peace of mind in every task, every day.


OPERATOR SENSING SYSTEM (OSS)

The truck's travel and mast lifting functions stop when the operator leaves the seat, ensuring the forklift won't perform any unintended movements.



LIMP HOME MODE

In the event of a critical issue, this feature enables the forklift to operate at reduced capacity, empowering operators to safely navigate to a designated area for inspection and repair.

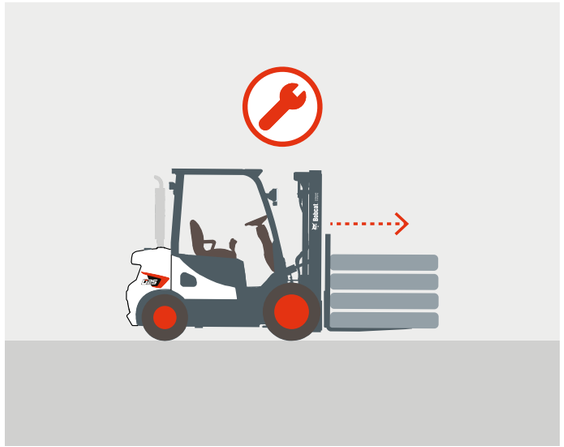

INTERLOCKING 4TH LEVER

The 4th lever is locked until manually released by pressing the button on the lever. This guarantees load security, eliminating the risk of unintended release.



WEIGHT SCALE

Never second-guess if you're overloading your forklift with our weight indicator or scale options.




SEAT BELT SEQUENCE INTERLOCK

The operator must be seated with a fastened seatbelt to operate the truck.



PARKING BRAKE ALERT

Prioritize operator safety and safeguard against accidental movement with our parking brake warning system.

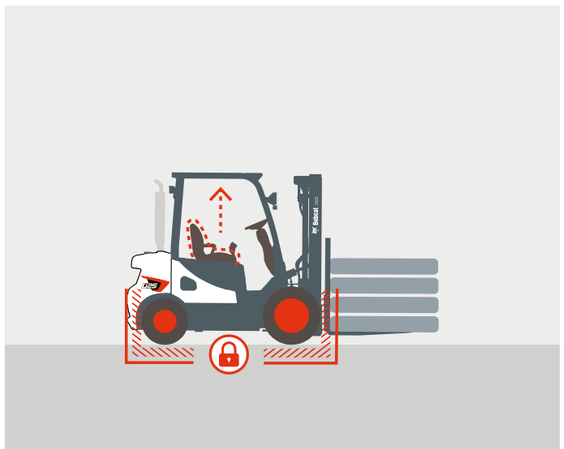

LARGE PANORAMIC MIRROR

The large panoramic mirror improves safety conditions and boosts overall productivity by enhancing rear visibility.



POWERFUL LED LIGHTS

The powerful LED lights can brighten even the darkest corners of your workplace, ensuring you're always aware of your surroundings.



BUILT TO LAST

EXCELLENT RELIABILITY

Thanks to a powerful engine, dust- and water-resistant parts, and shock-absorbing hydrostatic power steering, Bobcat's 7-Series Diesel Forklifts are built tough to provide you with maximum uptime and dependability.



THERE'S NO TIME FOR DOWNTIME. STAND UP TO EVERY TASK THAT COMES YOUR WAY, DAY AFTER DAY.

2 YEAR WARRANTY

WARRANTY

Bobcat develops every machine to the highest standards of quality and durability. That's why our standard warranty provides 24 months or 2 000 operating hours (whichever occurs first) of coverage.





Bobcat PROTECTION PLUS Extended Warranty

PROTECTION PLUS EXTENDED WARRANTY

Enjoy total peace of mind with Protection Plus extended warranty. Providing the same level of protection as the standard warranty, Protection Plus also reflects different customer needs and expectations by offering a choice of durations and annual operating hours.

EXTENSIVE DEALER NETWORK

You can rely on our network of dealers and service partners who are always ready to help you.

BOBCAT GENUINE PARTS

Quality components delivered to our dealers guarantee that all of our equipment is built to last, withstand the toughest conditions, and provide reliable performance.

MAIN SPECIFICATIONS

TECHNICAL DATA ACCORDING TO VDI 2198						
		Unit	D20S-7		D25S-7	
CHARACTERISTICS						
Drive			diesel			
Operator type			seated			
Load capacity	Q	kg	2 000		2 500	
Load centre	c		500			
Load distance: center of drive axle to fork	x	mm	480			
Wheelbase	y	mm	1 625			
WEIGHT						
Service weight		kg	3 690		4 065	
Tread, front	b11	mm	975			
Tread, rear	b12	mm	1 000			
DIMENSIONS						
Tilt of mast / fork carriage forward / backward	α/β	°	6 / 10			
Height, mast lowered	h1	mm	2 175			
Free lift	h2	mm	147			
Lift	h3	mm	3 230			
Height, mast extended	h4	mm	4 490			
Height of overhead guard	h6	mm	2 183			
Height of seat	h7	mm	1 026			
Overall length	l1	mm	3 565		3 630	
Length to forkface	l2	mm	2 530		2 595	
Overall width	b1/b2	mm	1 170			
Fork dimensions	s/e/l	mm	40 × 100 × 1 050			
Fork carriage ISO 2328, class / type A, B			II / A			
Fork carriage width	b3	mm	1 103			
Ground clearance, loaded, below mast	m1	mm	115			
Ground clearance, center of wheelbase	m2	mm	143			
Aisle width for pallets 1 000 × 1 200 crossways	Ast	mm	3 900		3 945	
Aisle width for pallets 800 × 1 200 lengthways	Ast	mm	4 100		4 145	
External turning radius	Wa	mm	2 220		2 265	
PERFORMANCE DATA						
Internal turning radius	b13	mm	775			
Travel speed, loaded / unloaded		km/h	18 / 19	19 / 19.5	17.5 / 18.5	19 / 19.5
Lift speed, loaded / unloaded		mm/s	530 / 580		520 / 550	
Lowering speed, loaded / unloaded		mm/s	510 / 460			
Drawbar pull, loaded / unloaded (@ 1.6km/h)		kg	1 574 / 1 559	1 769 / 1 747	1 569 / 1 569	1 750 / 1 740
Max. drawbar pull, loaded / unloaded		kg	1 856 / 1 817	2 050 / 2 017	1 858 / 1 834	2 031 / 2 011
Gradeability, loaded / unloaded (@ 1.6km/h)		%	29.5 / 48.5	33 / 55	25 / 43	28.2 / 50
Max. gradeability, loaded / unloaded		%	35 / 59	38.5 / 66.5	30 / 52.5	33 / 60.3
Service brake			foot / hydraulic			
COMBUSTION ENGINE						
Engine manufacturer / type			Yanmar / 4TNE94L	Yanmar / 4TNE98	Yanmar / 4TNE94L	Yanmar / 4TNE98
Engine power according to DIN ISO1585		kW	35.3	43.7	35.3	43.7
Rated speed		min-1	2 200	2 300	2 200	2 300
Torque at 1/min		Nm/rpm	167	191	167	191
Number of cylinders / displacement		-/cm³	4 / 4 / 3 054	4 / 4 / 3 319	4 / 4 / 3 054	4 / 4 / 3 319
ADDITIONAL DATA						
Fuel consumption according to VDI Cycle		l/h	12 / 85			
Operating pressure for attachments		bar	156			
Oil flow for attachments		l/min	60			
Fuel tank capacity		l	51			

Specification values in this sheet have been rounded. Performance may vary depending on operating conditions.
Products and specifications are subject to improvement and change without prior notice.

TECHNICAL DATA ACCORDING TO VDI 2198								
		Unit	D30S-7		D33S-7		D35C-7	
CHARACTERISTICS								
Drive			diesel					
Operator type			seated					
Load capacity	Q	kg	3 000		3 300		3 500	
Load centre	c		500					
Load distance: center of drive axle to fork	x	mm	485				495	
Wheelbase	y	mm	1 700				1 625	
WEIGHT								
Service weight		kg	4 565		4 750		4 915	
Tread, front	b11	mm	982					
Tread, rear	b12	mm	1 000					
DIMENSIONS								
Tilt of mast / fork carriage forward / backward	α/β	°	6 / 10					
Height, mast lowered	h1	mm	2 165					
Free lift	h2	mm	152					
Lift	h3	mm	3 230				3 000	
Height, mast extended	h4	mm	4 490				4 260	
Height of overhead guard	h6	mm	2 183					
Height of seat	h7	mm	1 026					
Overall length	l1	mm	3 744		3 774		3 809	
Length to forkface	l2	mm	2 700		2 730		2 765	
Overall width	b1/b2	mm	1 197				1 255	
Fork dimensions	s/e/l	mm	45 × 125 × 1 050					
Fork carriage ISO 2328, class / type A, B			III / A					
Fork carriage width	b3	mm	1 115					
Ground clearance, loaded, below mast	m1	mm	105					
Ground clearance, center of wheelbase	m2	mm	143					
Aisle width for pallets 1 000 × 1 200 crossways	Ast	mm	4 050		4 080		4 115	
Aisle width for pallets 800 × 1 200 lengthways	Ast	mm	4 250		4 280		4 315	
External turning radius	Wa	mm	2 365		2 395		2 420	
PERFORMANCE DATA								
Internal turning radius	b13	mm	761					
Travel speed, loaded / unloaded		km/h	17 / 18	18 / 18.5	17 / 18	18 / 18.5	17 / 18	18.5 / 19
Lift speed, loaded / unloaded		mm/s	500 / 550		490 / 550		420 / 550	
Lowering speed, loaded / unloaded		mm/s	510 / 460					
Drawbar pull, loaded / unloaded (@ 1.6km/h)		kg	1 624 / 1 604	1 831 / 1 797	1 614 / 1 604	1 822 / 1 807	1 554 / 1 549	1 807 / 1 750
Max. drawbar pull, loaded / unloaded		kg	1 944 / 1 887	2 150 / 2 091	1 932 / 1 891	2 140 / 2 106	1 854 / 1 813	2 055 / 2 034
Gradeability, loaded / unloaded (@ 1.6km/h)		%	22.5 / 38.5	25 / 43.5	21 / 37	23.5 / 42.5	19 / 34	24.5 / 40
Max. gradeability, loaded / unloaded		%	27 / 46.5	29.5 / 52	25 / 44.5	27.5 / 50.5	23 / 40.5	25 / 47
Service brake			foot / hydraulic					
COMBUSTION ENGINE								
Engine manufacturer / type			Yanmar / 4TNE94L	Yanmar / 4TNE98	Yanmar / 4TNE94L	Yanmar / 4TNE98	Yanmar / 4TNE94L	Yanmar / 4TNE98
Engine power according to DIN ISO1585		kW	35.3	43.7	35.3	43.7	35.3	43.7
Rated speed		min-1	2 200	2 300	2 200	2 300	2 200	2 300
Torque at 1/min		Nm/rpm	167	191	167	191	167	191
Number of cylinders / displacement		-/cm³	4 / 4 / 3 054	4 / 4 / 3 319	4 / 4 / 3 054	4 / 4 / 3 319	4 / 4 / 3 054	4 / 4 / 3 319
ADDITIONAL DATA								
Fuel consumption according to VDI Cycle		l/h	12 / 85					
Operating pressure for attachments		bar	156					
Oil flow for attachments		l/min	60					
Fuel tank capacity		l	51					

Note: Load capacities are based on the standard chassis without a side shifter.

STANDARD EQUIPMENT & OPTIONS

STANDARD EQUIPMENT & OPTIONS	
SAFETY	
Operator Sensing System	✓
Mast interlock – tilt, lift and lower	✓
2 front LED lights	✓
Spark arrestor	•
4th lever interlock	•
Safety light	•
Back-up alarm	•
Rear-view camera	•
ERGONOMICS	
Integrated instrument panel	✓
Excellent visibility	✓
Anti-slip step plate	✓
Adjustable steering column	✓
Panoramic mirror	•
Fingertip	•
Premium seat	•
Full cab	•
Rear grab bar	•
Steering wheel knob	•

STANDARD EQUIPMENT & OPTIONS	
PRODUCTIVITY	
High powered, fuel efficient engines	✓
Inching pedal	✓
Pedal Location (accelerator, brake and inching)	✓
Drive-in-rack overhead guard	✓
Autotilt levelling	•
Quick disconnect hose couplings	•
RELIABILITY	
Waterproof connectors	✓
Dual element air cleaner	✓
Pre-cleaner	•
Radiator screen	•
Vented side panel	•
SERVICEABILITY	
Tool-less side panel / floor plate	✓
Junction box	✓
Wide hood open angle	✓

*This list is based on factory data.
Standard or optional can vary for specific countries.

• = option
✓ = standard
– = not available


Excellent visibility


Pre-cleaner



Rear grab bar



Anti-slip step plate



Inching pedal


Panoramic mirror

DIMENSIONS

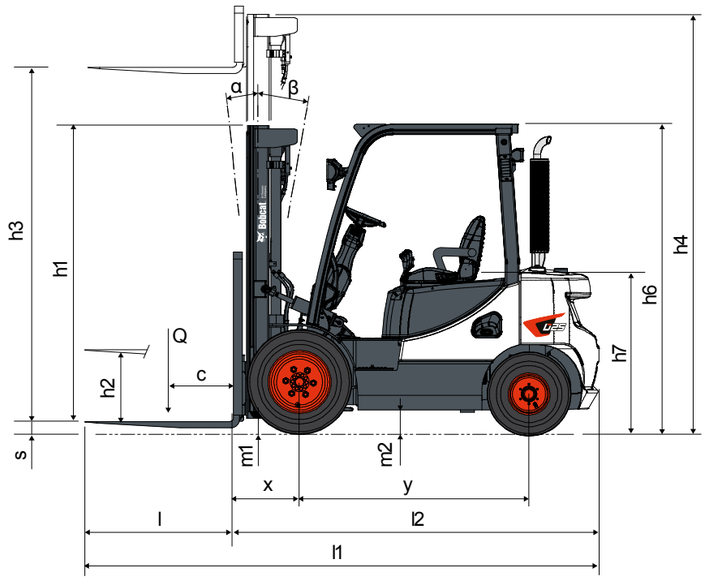

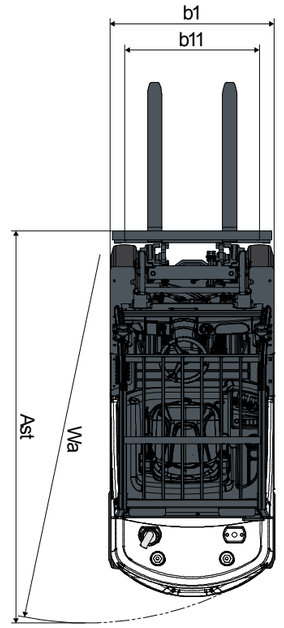

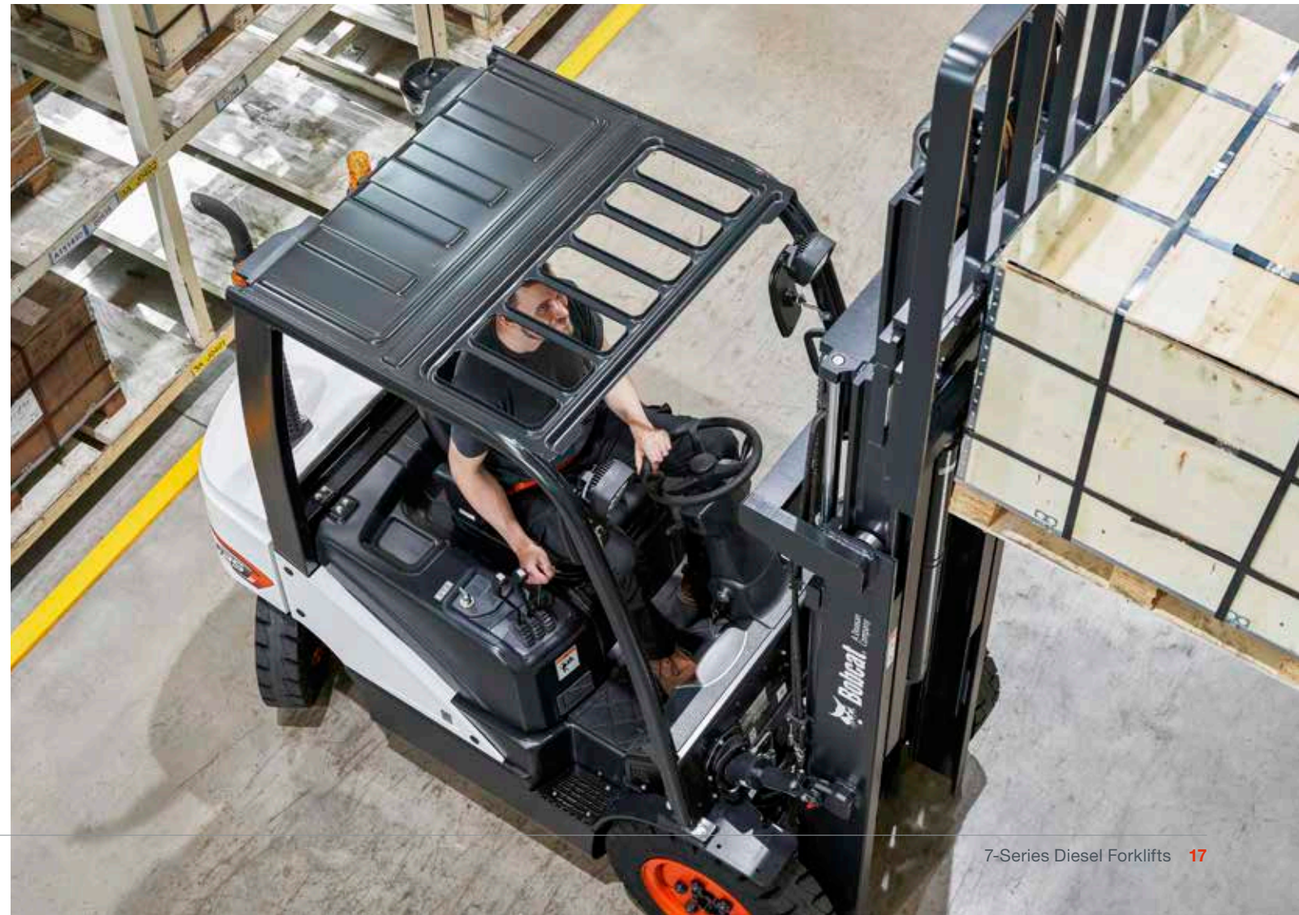

FINANCING OPTIONS



24, 36, OR 48 MONTH FINANCING*

Take advantage of 24, 36 or 48 month financing programs starting from **0% interest** and improve your cashflow. Ask your dealer for the financing offers available.


340 MACHINES / 150 ATTACHMENT FAMILIES / 1 TOUGH ANIMAL



SKID-STEER LOADERS



COMPACT TRACK LOADERS




BACKHOE LOADERS




COMPACT EXCAVATORS




FORKLIFTS

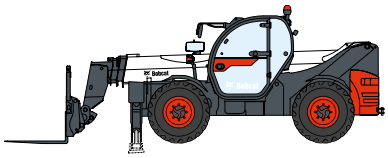


TELEHANDLERS

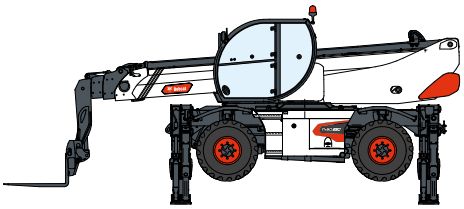

ROTARY TELEHANDLERS



WAREHOUSE EQUIPMENT



GENERATORS



AIR COMPRESSORS



LIGHTING SYSTEMS




SMALL ARTICULATED LOADERS



MINI TRACK LOADER



LIGHT COMPACTION EQUIPMENT



ATTACHMENTS

Bobcat

DOOSAN

Bobcat is a Doosan Company. Doosan is a global leader in construction equipment, power & water solutions, engines, and engineering proudly serving customers and communities for more than a century. | Bobcat and the Bobcat logo are registered trademarks of Bobcat Company in the United States and various other countries. ©2024 Bobcat Company. All Rights Reserved.

*Financing options may vary by country and dealer. Always ask your dealer about currently available financing options. Terms and conditions may apply.

Doosan Bobcat EMEA, U Kodetky 1810, 263 12 Dobříš, Czech Republic

www.bobcat.com

©2024 BOBCAT B4502711-EN (10-24)

GET IN TOUCH WITH US TODAY

Click one of the following links or scan the QR code:

Request a quote

Request a demo

Find a dealer