Bobcat

One Tough Animal

DIESEL & LPG FORKLIFTS

NXP-Series, Pneumatic, 2.0 to 3.5-ton capacity

MEA & CIS





TOUGH CONDITIONS.
TOUGHER PEOPLE.

At Bobcat, we're not just building machines—we're also celebrating the people who push them to the limit. Because real strength isn't just built into machines—it comes from the people who operate them.

LEARN MORE

ONE TOUGH ANIMAL



OUR MISSION

We empower operators to accomplish more, while working in the toughest conditions and tightest situations. When our customers have the will, we provide the way.

INTRODUCTION

BOBCAT'S HISTORY

In 1958, Melroe Manufacturing Company introduced a compact front-end loader that evolved quickly into the M400, the world's first true skid steer loader. The company soon adopted what became the world-famous 'Bobcat' brand – and its success paved the way for the global compact equipment industry we know today.

YEARS OF EXPERIENCE

In 2021, Bobcat furthered its reach by acquiring Doosan Industrial Vehicle, increasing its capacity to provide customers with comprehensive business solutions. With Doosan's expertise in material handling and warehouse equipment dating back to its inaugural forklift in 1968, the company has established a global presence, with 400 dealers across 93 countries.



BOBCAT TODAY

Now, with a diversified portfolio that includes forklifts and warehouse equipment, Bobcat serves as a one-stop solution for intralogistics needs, from loading shipping containers to optimizing warehouse operations. Made according to the highest manufacturing standards, Bobcat's material handling machines offer the precision and durability customers expect.



B4502601-EN (10-24)

TOUGH, AGILE & SAFE

UNMATCHED VALUE

The NXP Series combines entry-level accessibility with incredible power, durability, and operator comfort, promising outstanding value for your investment.







TOP PERFORMANCE, ALL DAY LONG

Our powerful, fuel-efficient engines promise high-performance, all day long.
P. 6–7



CONFIDENCE IN COMFORT

Easily navigate longer shifts with confidence thanks to an intuitive instrument panel, adjustable seat, small steering wheel, and spacious cab.
P. 8–9



OUTSTANDING SAFETY

With safety features like a mast lowering interlock, vibrant LED lights, and a reliable parking brake, operators can enjoy an even safer ride.
P. 10–11




BUILT TO LAST

Built for durability, the NXP Series delivers reliability through features like optimized airflow, engine protection, robust mast design, reduced vibrations, and anti-dust measures. Enjoy the power of Bobcat for years to come.
P. 12–13

B4502601-EN (10-24)

OUTSTANDING PRODUCTIVITY

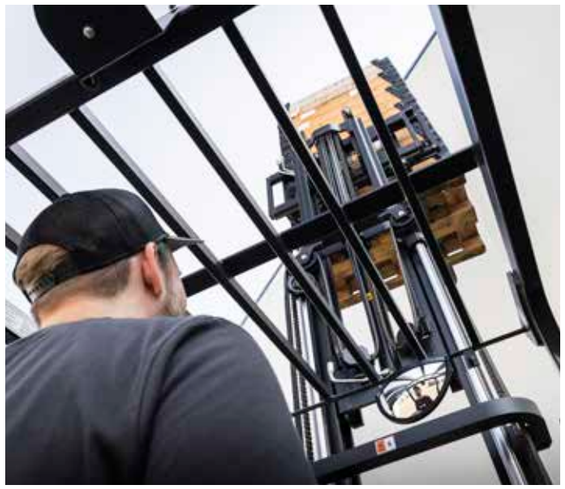

REACH HIGHER, ACHIEVE MORE

Our improved gear pump and mast regulator valve takes your truck to new heights, significantly increasing efficiency and productivity, especially in high-speed operations.



LIFT BIGGER

Get more stability with our new auxiliary weight. This feature lowers the truck's center of gravity, allowing it to lift bigger and stronger in heavy-duty applications.

NAVIGATE IMPOSSIBLE SPACES

Enjoy working in places where others cannot! Thanks to a small turning radius, you can maneuver in and out of the tightest spots with ease.



ELEVATED PERFORMANCE

The combination of a robust engine, advanced transaxle, and innovative frame structure has optimized gradeability, allowing operators of the NXP Series to confidently scale steep slopes of up to 25% grade.

COMFORT & CONTROLS









OPTIMIZED COMFORT & CONVENIENCE

Optimized for operator comfort and convenience, our cab design ensures efficient use of space, and a comfortable driving experience. Enjoy the benefits of a compact steering wheel, accompanied by an adjustable steering column and suspension seat.

MORE LEG ROOM

With more knee clearance and a relocated tilt cylinder, our trucks offer more leg space for enhanced comfort.





EFFORTLESS CONTROL

A compact steering wheel with a knob makes it easy to maneuver, control, and operate.

SIMPLIFIED OPERATION

The headlamp switches are seamlessly integrated for effortless operation.

EASY ENTRY



Our trucks are designed with operator comfort in mind with low step height, an easy entry bar, and a step plate enhanced with anti-slip tread.

ENHANCED COMFORT



For even more comfort, we've relocated the steering column to the left for a more natural posture, while the instrument panel has been shifted to the right for improved visibility.

SEE MORE, WORK BETTER



By lowering the cowl height (-40 mm) and tweaking the counterweight design, our NXP Series offers improved front and rear end visibility for safer driving conditions.

SAFETY IN EVERY MOVE

SAFETY AT EVERY TURN

Operate the truck with complete confidence thanks to the remarkable visibility through an expanded mast window, strategically repositioned hydraulic hoses, and a reduced cowl height. Safeguard operations with features like a mast lowering interlock, vibrant LED lights, and a reliable parking brake, while operators enjoy an even safer ride with optional blue safety lights, zone lights, and a rear-view camera.

OPERATOR SENSING SYSTEM (OSS)

The truck's travel and mast lifting functions stop when the operator leaves the seat so the forklift won't perform any unintended movements.



A MORE SECURE WORKPLACE

When the operator leaves the truck unattended, the hydraulic locking system prevents unintentional lowering and tilting of the mast. This keeps the truck, load, and job site safe.



PEDESTRIAN ALERTS

The blue safety light projects onto the floor around the truck, alerting pedestrians to the approaching vehicle.



SAFETY ZONES

The vehicle projects red light-zone onto the ground, marking a safe area for pedestrians in close proximity to the vehicle.



BACKUP ALARM

While traveling in reverse, the backup alarm sounds to warn people in the vicinity of the approaching truck, making the workplace safer for everyone.



PARKING BRAKE ALERT

Prioritize operator safety and safeguard against accidental movement with our parking brake warning system.



PANORAMIC VIEW

Providing greater visibility of the rear working area, the large panoramic mirror improves safety while adding to overall productivity.



ILLUMINATE YOUR WORKPLACE

The LED lights illuminate even the darkest corners of your workplace, keeping you safe and aware of your surroundings.



B4502601-EN (10-24)

BUILT TO LAST

NO JOB TOO TOUGH

Made for robust performance in heavy-duty and dusty environments, this truck offers anti-dust design, pre-cleaner, and double filter. It also boasts features like a protective belly plate, vented side panels, engine guard, and heavy-duty cooling for optimal functionality.




THERE'S NO TIME FOR DOWNTIME. STAND UP TO EVERY TASK THAT COMES YOUR WAY, DAY AFTER DAY.

2 YEAR WARRANTY

WARRANTY

Bobcat develops every machine to the highest standards of quality and durability. That's why our standard warranty provides 24 months or 2000 operating hours (whichever occurs first) of coverage.



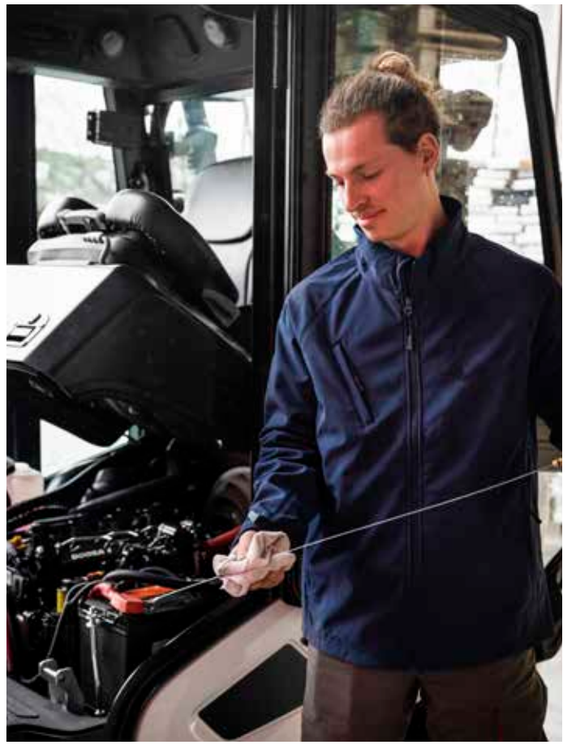

Bobcat PROTECTION PLUS Extended Warranty

PROTECTION PLUS EXTENDED WARRANTY

Enjoy total peace of mind with Protection Plus extended warranty. Providing the same level of protection as the standard warranty, Protection Plus also reflects different customer needs and expectations by offering a choice of durations and annual operating hours.

EXTENSIVE DEALER NETWORK

You can rely on our network of dealers and service partners who are always ready to help you.

BOBCAT GENUINE PARTS

Quality components delivered to our dealers guarantee that all of our equipment is built to last, withstand the toughest conditions and provide reliable performance.

STANDARD EQUIPMENT & OPTIONS

STANDARD EQUIPMENT & OPTIONS	DIESEL TRUCKS NXP	LPG TRUCKS NXP
SAFETY& STABILITY		
Operating Sensing System (OSS)	✓	✓
Back-up alarm – inside	✓	✓
Control valve with hydraulic locking	✓	✓
Rear safety light(s)	•	•
Rear grab handle with horn switch	•	•
Static ground strap	•	•
Strobe light	•	•
Autoshift controller	•	•
Ground speed control	–	•
Spark arrestor	–	•
Red or blue fence (zone) lights	•	•
PRODUCTIVITY		
Auxilary weight	✓	✓
Power shoe brakes	✓	✓
High-powered, fuel-efficient engine	✓	✓
Quick Disconnect Hose Couplings	✓	✓
RELIABILITY		
Mast with JJ beam	✓	✓
Anti dust overhead guard	✓	✓
Single (NX) or dual element air cleaner (NXP)	✓	✓
Increased fan ratio	✓	✓
Bottom frame protection	✓	✓
Horizontal inside exhaust muffler	✓	✓
Pre-cleaner	•	•

STANDARD EQUIPMENT & OPTIONS	DIESEL TRUCKS NXP	LPG TRUCKS NXP
SERVICEABILITY		
Toolless side panel	✓	✓
Toolless floor plate	✓	✓
Hood locking cylinder	✓	✓
Junction box	✓	–
Separate brake oil reservoir with indicator	✓	✓
Tool kit	•	•
OPERATOR COMFORT (ERGONOMICS)		
Clear front/rear mast visibility	✓	✓
LED combination lights	✓	✓
Entry grab bar	✓	✓
Anti-slip step plate	✓	✓
Panoramic mirror	✓	✓
Integrated lamp switch	✓	✓
Compact steering wheel with steering knob	✓	✓
Clip board	✓	✓
Modular cab – Type A, B, C	•	•
Full cab (with heater & air conditioner)	•	•
Cup holder	•	•
USB port	•	•
Fuel cap with key	•	–
Operator fan	•	•

*This list is based on factory data. Standard or optional can vary for specific countries.

• = option ✓ = standard – = not available



Compact steering wheel with steering knob




Anti-slip step plate



LED combination lights



Auxiliary weight

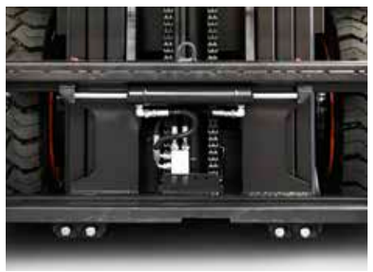


Quick disconnect hose couplings




Clipboard


DIMENSIONS


DIESEL

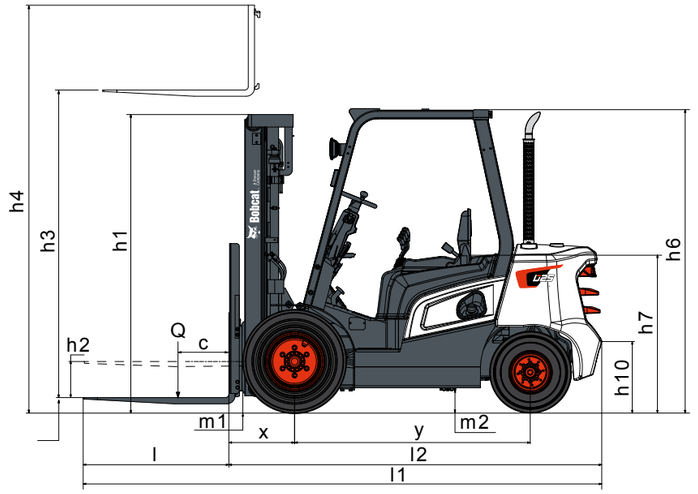

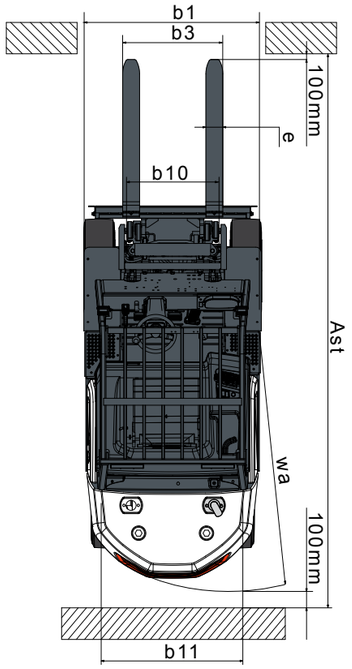

LPG

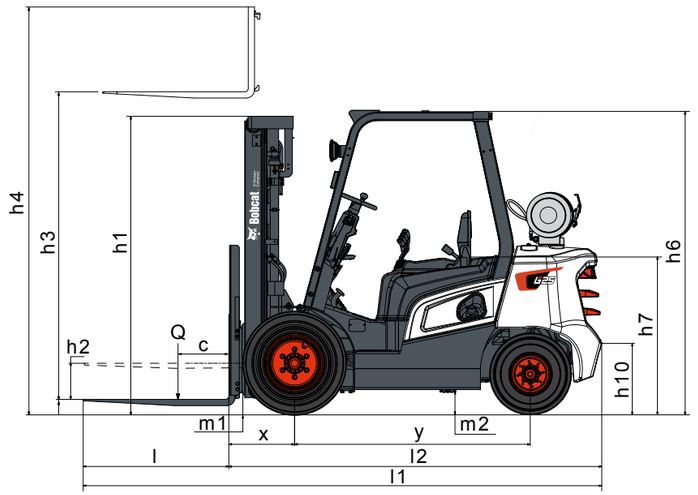

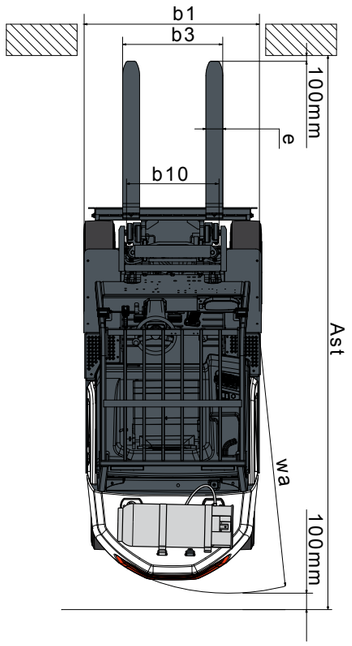

MAIN SPECIFICATIONS – DIESEL 1/2

TECHNICAL DATA ACCORDING TO VDI 2198												
CHARACTERISTICS		**Unit**	**D20NX PLUS**			**D25NX PLUS**			**D30NX PLUS**	**D33NX PLUS**		**D35NX PLUS**
Drive			Diesel							Diesel		
Operator type			seated							seated		
Load capacity	Q	kg	2 000			2 500			3 000	3 300		3 500
Load center	c	mm	500							500		
Load distance: center of driveaxle to fork	x	mm	472						472	477		
Wheelbase	y	mm	1 700							1 700		
TIRES												
Tread, front	b11	mm	1 060							1 060		
Tread, rear	b12	mm	980							980		
DIMENSIONS												
Tilt of mast / fork carriage forward / backward	α / β	°	6 / 10							6 / 10		
Height, mast lowered	h1	mm	2 005 – 3 150							2 005 – 3 150		
Free lift	h2	mm	150 – 1 940							150 – 1 940		
Lift	h3	mm	3 000 – 7 060							3 000 – 7 060		
Height, mast extended	h4	mm	3 824 – 8 298						3 824 – 8 298	3 829 – 8 303		
Height of overhead guard	h6	mm	2 160							2 160		
Height of seat	h7	mm	1 185							1 185		
Overall length	l1	mm	3 610			3 660			3 715	3 780		3 800
Length to forkface	l2	mm	2 560			2 610			2 665	2 730		2 750
Overall width	b1/b2	mm	1 290							1 290		
Fork dimensions	s / e / l	mm	45 × 100 × 1 050						45 × 122 × 1 050	50 × 125 × 1 050		
Fork carriage ISO 2328, class			II							III		
Fork carriage width	b3	mm	1 042							1 042		
Ground clearance, loaded, below mast	m1	mm	132							132		
Ground clearance, center of wheelbase	m2	mm	135							135		
Aisle width for pallets 1 000 × 1 200 crossways	Ast	mm	3 952			4 002			4 087	4 137		4 157
Aisle width for pallets 800 × 1 200 lengthways	Ast	mm	4 152			4 202			4 287	4 337		4 357
External turning radius (mm)	Wa	mm	2 280			2 330			2 415	2 460		2 480
Internal turning radius (mm)	b13	mm	735							735		
PERFORMANCE DATA												
Travel speed, loaded / unloaded		km/h	18.5 / 19.5	20 / 21	19 / 19	18.5 / 19.5	20 / 21	19 / 19	18.5 / 19.5	20 / 21	19 / 19	18.5 / 19.5	20 / 21	19 / 19
Lift speed, loaded / unloaded		mm/s	520 / 550	580 / 600	510 / 600	520 / 550	570 / 600	510 / 600	520 / 550	560 / 600	490 / 600	420 / 450	480 / 500	410 / 460	420 / 450	460 / 480	390 / 440
Lowering speed, loaded / unloaded		mm/s	420 / 550							420 / 550		470 / 500	420 / 550		470 / 500	420 / 550	420 / 550
Drawbar pull, loaded / unloaded (@ 1.6 km / h)		kg	1 805 / 1 764	1 830 / 1 764	1 449 / 1 394	1 785 / 1 754	1 811 / 1 757	1 449 / 1 394	1 764 / 1 734	1 787 / 1 745	1 449 / 1 394	1 754 / 1 713	1 774 / 1 740	1 449 / 1 394	1 744 / 1 693	1 767 / 1 737	1 449 / 1 394
Max. drawbar pull, loaded / unloaded		kg	2 060 / 1 999	2 150 / 2 046	1 759 / 1 669	2 039 / 1 988	2 130 / 2 038	1 759 / 1 669	2 019 / 1 968	2 106 / 2 027	1 759 / 1 669	1 988 / 1 937	2 093 / 2 021	1 759 / 1 669	1 988 / 1 937	2 086 / 2 022	1 759 / 1 669
Gradeability, loaded / unloaded (@ 1.6 km / h)		%	30 / 55	34 / 55	27 / 4	28 / 50	29.4 / 50	23 / 38.5	23 / 42	24.5 / 43	20 / 36	22 / 40	23 / 41	18.4 / 32.5	22 / 40	22 / 39	17.6 / 31.5
Max. gradeability, loaded / unloaded		%	38 / 62	41 / 66	34 / 35	30 / 58	32 / 60	29.5 / 50	28 / 50		25 / 43	25 / 46	26 / 47	23 / 40	24 / 44	25 / 45	22 / 39.5
Service brake			foot / hyd							foot / hyd							
COMBUSTION ENGINE																	
Engine manufacturer / type			Yanmar 4TNE98 | Yanmar 4TNE94L | Kubota V2403							Yanmar 4TNE98 | Yanmar 4TNE94L | Kubota V2403							
Engine power according to DIN ISO1585		kW	43.7 | 34.2 | 42.6							43.7 | 34.2 | 42.6							
Rated speed		min-1	2 300 | 2 200 | 2 400							2 300 | 2 200 | 2 400							
Torque at 1 / min		Nm/rpm	181 @ 1 600 | 162 @ 1 500 | 196.5 @ 1 500							181 @ 1 600 | 162 @ 1 500 | 196.5 @ 1 500							
Cycle / number of cylinders / displacement		-/cm³	4 / 4 3 319 | 4 / 4 3 053 | 4 / 4 2 434							4 / 4 3 319 | 4 / 4 3 053 | 4 / 4 2 434							
Battery voltage / normal capacity		V/Ah	12 / 90							12 / 90							

Specification values quoted in this specification sheet have been rounded. Performance may vary depending on operating conditions.
Products and specifications are subject to improvement and change without prior notice.
(1) Mast dimensions refer to a range from the lowest to highest available mast with load backrest.

Note: Load capacities are based on the standard chassis without side shifter.

MAIN SPECIFICATIONS – DIESEL 2/2


TECHNICAL DATA ACCORDING TO VDI 2198					
CHARACTERISTICS		**Unit**	**D30NX**		**D35NX**
Drive			Diesel		
Operator type			rider-seated		
Load capacity	Q	kg	3 000		3 500
Load center	c	mm	500		
Load distance: center of driveaxle to fork	x	mm	467		472
Wheelbase	y	mm	1 700		1 750
TIRES					
Tread, front	b11	mm	1 060		
Tread, rear	b12	mm	980		
DIMENSIONS					
Tilt of mast / fork carriage forward / backward	α / β	°	6 / 10		
Height, mast lowered	h1	mm	2 005 – 3 150		
Free lift	h2	mm	150 – 1 940		
Lift	h3	mm	3 000 – 7 060		
Height, mast extended	h4	mm	3 824 – 8 298		3 529 – 8 303
Height of overhead guard	h6	mm	2 160		
Height of seat	h7	mm	1 185		
Overall length	l1	mm	3 715		3 800
Length to forkface	l2	mm	2 665		2 750
Overall width	b1/b2	mm	1 290		
Fork dimensions	s/e/l	mm	45 × 122 × 1 050		50 × 122 × 1050
Fork carriage ISO 2328, class			III		
Fork carriage width	b3	mm	1 046		
Ground clearance, loaded, below mast	m1	mm	132		
Ground clearance, center of wheelbase	m2	mm	135		
Aisle width for pallets 1 000 × 1 200 crossways	Ast	mm	4 110		4 180
Aisle width for pallets 800 × 1 200 lengthways	Ast	mm	4 310		4 400
External turning radius	Wa	mm	2 430		2 500
Internal turning radius	b13	mm	170		
PERFORMANCE DATA					
Travel speed, loaded / unloaded		km/h	19.5 / 21	19.5 / 21	19 / 20.5
Lift speed, loaded / unloaded		mm/s	560 / 600	460 / 490	
Lowering speed, loaded / unloaded		mm/s	485 / 560	410 / 460	
Drawbar pull, loaded / unloaded (@ 1.6 km / h)		kg	1 585 / 1 555	1 565 / 1 548	1 867 / 1 830
Max. drawbar pull, loaded / unloaded		kg	1 883 / 1 818	1 863 / 1 811	2 193 / 2 119
Gradeability, loaded / unloaded (@ 1.6 km / h)		%	22 / 37.9	19.5 / 35.1	23.5 / 42.6
Max. gradeability, loaded / unloaded		%	26.4 / 45.6	23.4 / 42	27.8 / 50.8
Service brake			foot / hyd		
COMBUSTION ENGINE					
Engine manufacturer / type			Quanchai / CR 493		Quanchai / CR 498
Engine power according to DIN ISO1585		kW	36.7		46
Rated speed		min-1	2 500		
Torque at 1 / min		Nm/rpm	175 @ 1 800		200 @ 1 800
Cycle / number of cylinders / displacement		-/cm³	4 / 4 / 2 850		4 / 4 / 3 170
Battery voltage / normal capacity		V/Ah	12 / 90		

Specification values quoted in this specification sheet have been rounded. Performance may vary depending on operating conditions.
Products and specifications are subject to improvement and change without prior notice.
(1) Mast dimensions refer to a range from the lowest to highest available mast with load backrest.

MAIN SPECIFICATIONS LPG

TECHNICAL DATA ACCORDING TO VDI 2198						
CHARACTERISTICS		**Unit**	**G25NX PLUS**	**G30NX PLUS**	**G33NX PLUS**	**G35NX PLUS**
Drive			LPG			
Operator type			seated			
Load capacity	Q	kg	2 500	3 000	3 300	3 500
Load center	c	mm	500			
Load distance: center of driveaxle to fork	x	mm	472		477	
Wheelbase	y	mm	1 700			
TIRES						
Tread, front	b11	mm	1 060			
Tread, rear	b12	mm	980			
DIMENSIONS						
Tilt of mast / fork carriage forward / backward	α / β	°	6 / 10			
Height mast lowered	h1	mm	2 005 – 3 150			
Free lift	h2	mm	150 – 1 975			
Lift	h3	mm	3 000 – 7 060			
Height mast extended	h4	mm	4 247 – 8 298		4 252 – 8 303	
Height of overhead guard	h6	mm	2 160			
Height of seat	h7	mm	1 185			
Overall length	l1	mm	3 660	3 715	3 780	3 800
Length to forkface	l2	mm	2 610	2 665	2 730	2 750
Overall width	b1 / b2	mm	1 290			
Fork dimensions	s / e / l	mm	45 × 100 × 1 050	45 × 122 × 1 050	50 × 125 × 1 050	
Fork carriage ISO 2328 class			II	III		
Fork carriage width	b3	mm	1 042			
Ground clearance loaded below mast	m1	mm	132			
Ground clearance center of wheelbase	m2	mm	135			
Aisle width for pallets 1 000 × 1 200 crossways	Ast	mm	4 002	4 087	4 137	4 157
Aisle width for pallets 800 × 1 200 lengthways	Ast	mm	4 202	4 287	4 337	4 357
External turning radius	Wa	mm	2 330	2 415	2 460	2 480
Internal turning radius	b13	mm	735			
PERFORMANCE DATA						
Travel speed loaded / unloaded		km/h	20 / 21			
Lift speed loaded / unloaded		mm/s	510 / 530		410 / 430	
Lowering speed loaded / unloaded		mm/s	420 / 550		470 / 500	
Drawbar pull loaded / unloaded (@ 1.6 km / h)		kg	1 754 / 1 716	1 723 / 1 703	1 713 / 1 693	1 703 / 1 693
Max. drawbar pull loaded / unloaded		kg	1 968 / 1 907	1 948 / 1 897	1 937 / 1 886	1 927 / 1 886
Gradeability loaded / unloaded (@ 1.6 km / h)		%	28 / 48	24 / 42	22 / 40	21 / 38
Max. gradeability loaded / unloaded		%	32 / 55	27 / 48	25 / 45	24 / 43
Service brake			Hydraulic			
COMBUSTION ENGINE						
Engine manufacturer / type			HMC G424I			
Engine power according to DIN ISO1585		kW	454			
Rated speed		min-1	2 600			
Torque at 1 / min		Nm/rpm	179 @ 2 000			
Cycle / number of cylinders / displacement		-/cm³	4 / 4 / 2 359			
Battery voltage / normal capacity		V/Ah	12 / 45			

Note: Load capacities are based on the standard chassis without side shifter.

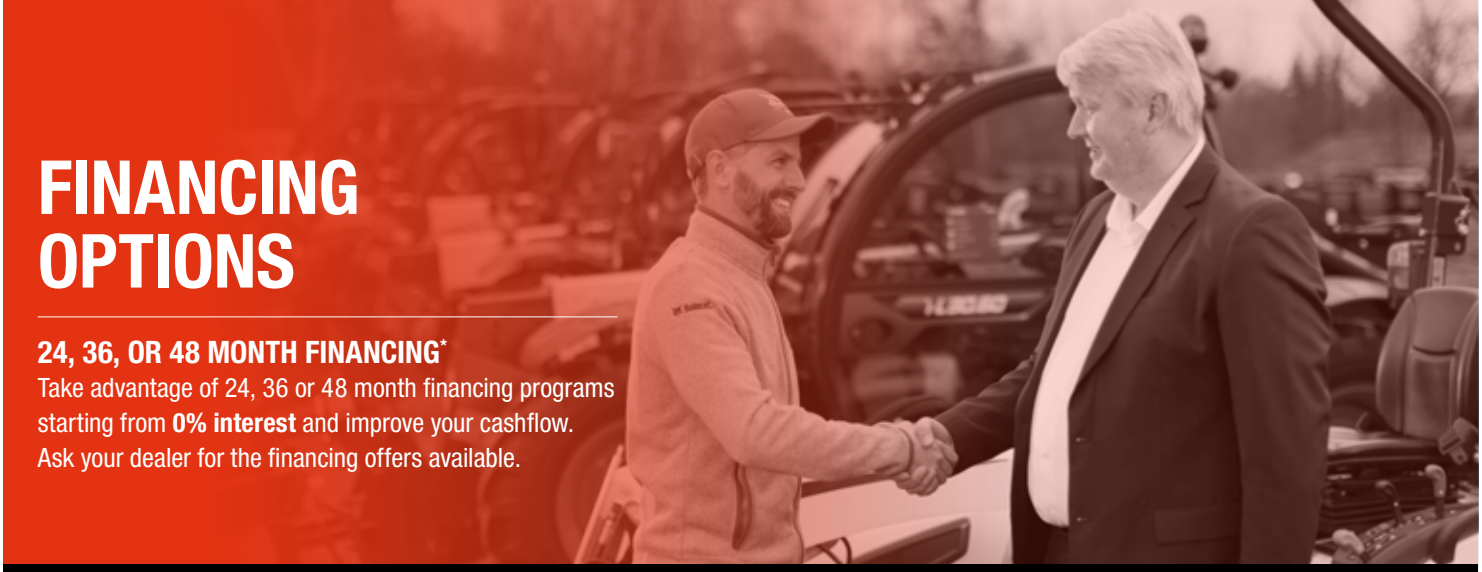

FINANCING OPTIONS

24, 36, OR 48 MONTH FINANCING*

Take advantage of 24, 36 or 48 month financing programs starting from **0% interest** and improve your cashflow. Ask your dealer for the financing offers available.


340 MACHINES / 46 PRODUCT FAMILIES / 1 TOUGH ANIMAL



SKID-STEER LOADERS




COMPACT TRACK LOADERS




COMPACT WHEEL LOADERS



FORKLIFTS

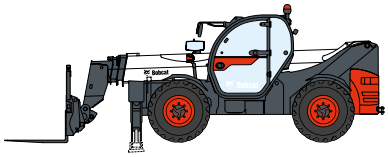


TELEHANDLERS

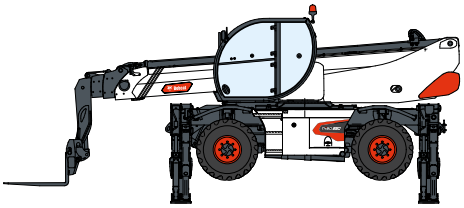

ROTARY TELEHANDLERS



LIGHT COMPACTION EQUIPMENT




COMPACT EXCAVATORS




COMPACT TRACTORS




SMALL ARTICULATED LOADERS



MINI TRACK LOADER



PORTABLE POWER



ATTACHMENTS

Bobcat

DOOSAN

Bobcat is a Doosan Company. Doosan is a global leader in construction equipment, power & water solutions, engines, and engineering proudly serving customers and communities for more than a century. | Bobcat and the Bobcat logo are registered trademarks of Bobcat Company in the United States and various other countries. ©2024 Bobcat Company. All Rights Reserved.

*Financing options may vary by country and dealer. Always ask your dealer about currently available financing options. Terms and conditions may apply.

Doosan Bobcat EMEA, U Kodetky 1810, 263 12 Dobříš, Czech Republic

www.bobcat.com

©2024 BOBCAT B4502601-EN (10-24)

GET IN TOUCH WITH US TODAY

Click one of the following links or scan the QR code:

Request a quote

Request a demo

Find a dealer